

# Installation of Skirting

Installatie Plinten | Installation Plinthes  
Installation Sockelleisten | Instalación Zócalos



**ORAC**  
DECOR

**ORAC nv/sa**  
Biekorfstraat 32, 8400 Ostend, Belgium  
T +32 (0)59 80 32 52 | F +32 (0)59 80 28 10  
info@oracdecor.com | www.oracdecor.com

## Ready?

Surface & Atmosphere



**Storage and installation conditions: Place profiles and adhesives at room temperature 24hrs before installation**  
Opslag- en plaatsingsvoorwaarden: Plaats profielen en lijmen 24 uur vóór de installatie op kamertemperatuur  
Conditions d'installation et de stockage: Stockez les profils et les colles à température ambiante 24 heures avant la pose  
Lager- und Installationsbedingungen: Profile und Kleber 24 Stunden vor Verlegung bei Zimmertemperatur lagern  
Condiciones de almacenamiento y de instalación: Colocar molduras y adhesivos en el lugar 24 horas antes de la aplicación



**Dust free**  
Stofvrij  
Sans poussière  
Staubfrei  
Libre de polvo



**Sand and wash surface**  
Schoor en reinig de ondergrond  
Poncez et nettoyez la surface  
Schleifen und reinigen Sie den Untergrund  
Superficie lavada y arenosa



**Flat wall & floor**  
Vlakke wand en vloer  
Mur et sol plats  
Plane Wand und Boden  
Paredes y suelo lisos



**Dry**  
Droog  
Sec  
Trocken  
Seco



**No grease**  
Vetvrij  
Sans graisse  
Fettfrei  
Sin grasa

## Set?

DecoFix Adhesives

**ONLY FULL GUARANTEE WITH DECOFIX**  
VOLLEDIGE GARANTIE ENKEL BIJ GEBRUIK VAN DECOFIX  
GARANTIE TOTALE UNIQUEMENT AVEC COLLE DECOFIX  
VOLLSTÄNDIGE GARANTIE NUR BEI DER VERWENDUNG VON DECOFIX  
GARANTÍA COMPLETA SÓLO SI SE UTILIZA DECOFIX


### Interior, porous and dry surface

Binnen, poreuze en droge ondergronden  
Pose à l'intérieur, surfaces poreuses, pièces non humides  
Innen, poröse/saugfähige und trockene Untergründe  
Interior, superficies porosas y secas



### Exterior, non-porous and humid surface

Buiten, niet-poreuze en vochtige ondergronden  
Pose à l'extérieur, surfaces non poreuses, environnement humide  
Außen, nicht-poröse/saugfähige Untergründe und Feuchträume  
Exterior, superficies no porosas, ambientes húmedos



1



**Seal wall**

Verbinding muur  
Adhésion mur  
Verbindung Wand  
Adherencia paredes



### DecoFix Pro

**Strong, water-based acrylic installation adhesive**

FDP500 310ml | 7 > 8m  
FDP600 4200ml | 65 > 110m



or  
of | ou |  
oder | o



### DecoFix Hydro

**Very strong MS-Polymer-based installation adhesive**

FDP700 290 ml | 7 > 8m



2



**Joint between mouldings\***

Verbinding tussen profielen  
Joints entre les profils  
Nahtverbindungen zwischen Profilen  
Uniones de los perfiles



### DecoFix Extra

**Polyurethane-based adhesive\***

FX200 310ml | min. 80m  
FX210 tube 80ml | min. 20m





# Go!

## Installation of Skirting




Installatie Plinten | Installation Plinthes  
Installation Sockelleisten | Instalación Zócalos




**2a** Inside corner | Binnenhoek | Coin intérieur  
| Innenecke | Esquina interna



**2b** Outside corner | Buitenhoek | Coin extérieur  
| Aussenecke | Esquina externa

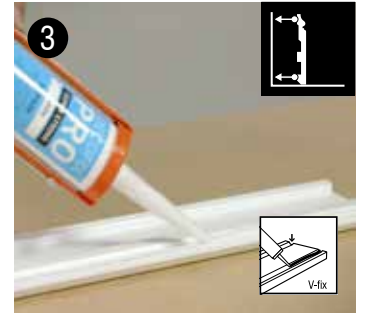

**Apply adhesive in V-Fix over the entire length** | Breng lijm over volledige lengte aan in V-Fix | Appliquez la colle sur toute la longueur dans V-Fix | Tragen Sie den Kleber in die V-Fugen entlang des Profiles auf | Aplicar cola en V-Fix a lo largo de todo el perfil



**Push firmly** | Duw stevig aan | Pressez fermement | Fest andrücken | Presione bien



**Removal** | Verwijderen | Enlever | Entfernen | Eliminar  
**DecoFix Pro: humid sponge** Vochtige spons | Eponge humide | Feuchtem Schwamm | Esponja húmeda  
**DecoFix Hydro: soap solution** | Zeepoplossing | Solution savonneuse | Seifenlösung | Agua y jabón



**Use DecoFix Extra in every joint** | Gebruik DecoFix Extra in elke naad | Utilisez DecoFix Extra pour chaque joint | Verwenden Sie DecoFix Extra bei jeder Naht | Utilice DecoFix Extra en todas las juntas



**Push firmly** | Duw stevig naar elkaar toe | Poussez fermement | Fest aneinander drücken | Presione con firmeza



**Remove excess adhesive in joints with spatula after max. 1 hr, repeat after 2-3 hours. Clean with Acetone/ synth. Thinner** | Verwijder de overtollige lijm vóór uitharding (na max. 1 uur en na 2 tot 3 uur) | Éliminez les excès de colle avant le durcissement (1 heure max. et recommencez après 2-3 heures | Überschüssigen Kleber vor dem Aushärten mit einer Spachtel entfernen durch Abziehen (nach 1 Std und nach 2-3 Std wiederholen) | Eliminar cola excesiva antes de endurecer (max. 1 hora y repetir 2-3 horas después)



**Immediately paintable** | Onmiddellijk overschilderbaar | Prêt à peindre immédiatement | Sofort Überstreichbar | Inmediatamente pintable

## Installation Video



& other manuals: scan the QR code

